

WOOD AND GLASS SHELVING SYSTEMS



SYMBOLS AND FINISHES LEGEND

SYMBOLS



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= NEWTON



= PART.NO



= HEXAGONAL SOCKET



= FRICTION



= PCS. PER PACKAGE



= BLADE SLOT



= AUTOMATIC



= COMBI SLOT



= DROP DOWN



= CAPACITY LOADING



= COUNTERSUNK HEAD



= STANDARD HINGE



= WOOD / GLASS THICKNESS



= PAN HEAD





= HOLE DIAMETER



= FLANGE HEAD



= KIMANA HINGE



= DIAMETER



= FLAT HEAD



= FLAP HINGE



= LENGTH



= TRILOBULAR SCREW



= WITH SPRING



= HEIGHT



= SELF-TAPPING SCREW



= WITHOUT SPRING



= RIGHT VERSION



= EURO THREAD

= METRIC THREAD



= REVERSED SPRING



= LEFT VERSION



= PRE-INSERTED SCREW



= FOR ROUND TUBE



= PCS. PER PAD



= PRE-INSERTED SCREW AND SPREADING BUSH



= FOR OVAL TUBE



= CUT ON REQUEST



= WITH BUFFER





= WITH FLANGE



= SELF ADHESIVE



MATERIALS






HSS = High Speed Steel



ABS = Acrylonitrile
Butadiene Styrene



STzk = Zinc-plated Steel

AL = Aluminium

(WD) = Wood

EVA = Ethylene Vinyl Acetate



= ENGINEERING PLASTIC

+ EP = other engineering plastic available on request

SR = SOFT RUBBER



(EPn) = Natural Engineering Plastic

EPc = Clear Engineering Plastic


SRn = Natural Soft Rubber

EPw = White Engineering Plastic

EPg = Grey Engineering Plastic

SRW = White Soft Rubber

EPwg = Water Green Engineering Plastic





FINISHES



= OTHER FINISHES AVAILABLE ON REQUEST

PART. NO	FINISHES	PART. NO	FINISHES	PART. NO	FINISHES
AA	Natural	JB	Bright Aluminium	PZ	Beech
AB	White	JC	Aluminium - Chrome	QA	Maple
AC	Opal White	JD	Matt Aluminium	QB	Walnut
AE	White 9010	JE	Satin-finished Aluminium	WA	Bronzed
AK	Champagne	JF	Aluminium - Brass	WI	Burnished
AL	lvory	JG	Aluminium 5	XD	Satin-finished Steel
EA	Black	JL	Aluminium PE 11	YA	Nickel-plated
EB	Glossy Black	JM	Aluminium RAL 9006	YB	Bright Nickel-plated
EC	Matt Black	KA	Chrome	YC	Matt Nickel-plated
GR	Raw	KB	Bright Chrome	YD	Satin-finished Nickel-plated
НА	Brass-Plated	KC	Matt Chrome	ZA	Zinc alloy
НН	Tropicalized	MA	Brown	ZN	Zinc-plated
HL	Raw Brass	MB	Light Brown 1	ZQ	Bright Gold
IA	Grey	NN	Metallic Beige	ZY	Titanum
IB	Metallic Grey	NO	Beige	ZZ	Clear
IF	Middle Grey	OA	Oak	00	Insignificant finish
IJ	Light Grey	OZ	Ash		
IL	Grey 20	PA	Light Ash		
JA	Aluminium	PY	Cherry		



KAIMAN MAXI

KAIMAN MAXI: combined wall bracket and shelf support for wood shelf 39 to 73mm thick.

Can be fixed:


- to cement wall with rawlplug Ø 8mm and pan head screw Ø 5x50mm.
- to wood panels with \varnothing 5mm countersunk head screw only;
- to wood panels 18mm thick with special designed spreading dowel and M6 bolt.
- to plaster board with umbrella fitting Ø 8mm and pan head screw M4x46mm.

Useful fixing method for aligning wall brackets and shelf inclination adjustment as required.

Capable of supporting a 25Kg load each (shelf weight included), for a shelf 320mm deep.

Zinc alloy Engineering plastic








WOOD PANEL




Recommended fixing countersunk screw type - head \emptyset 5 mm max.

SOLID AND PLASTERBOARD WALLS




BRACKET ALIGNMENT




It is the responsability of the customer:

- to ensure that the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue

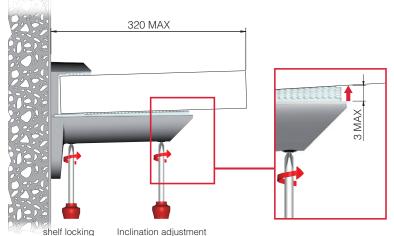



SHELF LOCKING AND INCLINATION ADJUSTMENT




COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)












POSITION OF THE RIDGE PLATE

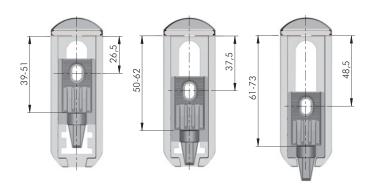


Wood and honeycomb shelves




Shelf is clamped between a layer of ridged plastic on both the lower and upper side (coloured parts).

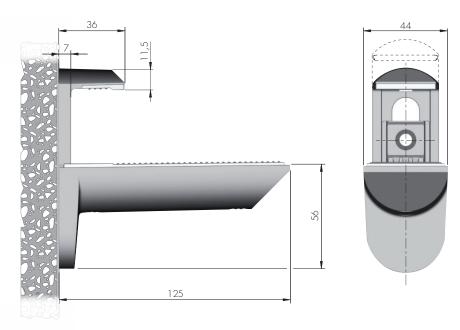

NOTE: KAIMAN MAXI is supplied in carton box including 2 pieces, accessories and fitting guide. Countersunk fixing screws Ø 5x50 and rawlplugs Fischer SX Ø 8x40 to wall are included.





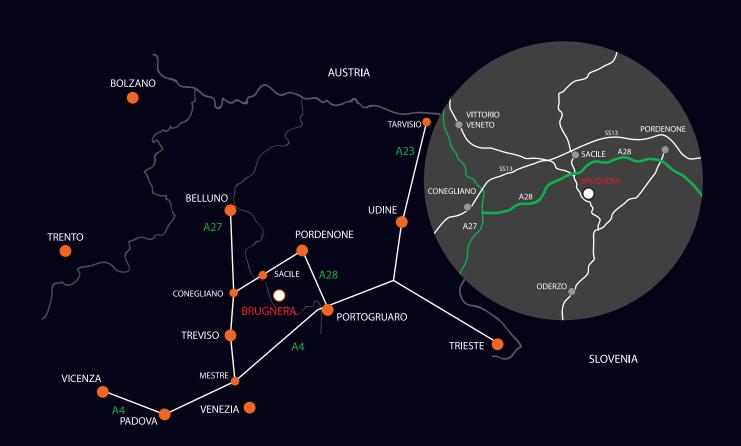



www.italianaferramenta.com